

Zen


Polyamide carpet, known for its durability, can be used in any room. One of the most important advantages is the fact that the carpet fibers can stand up to a lot of wear and tear. This makes the use of nylon carpeting especially practical in areas where there is a lot of foot traffic since the synthetic fibers hold their shape longer than many other types of fibers. As a result, the pile of the polyamide carpeting looks new and fresh for many more years than other carpeting selections.

APPLICATIONS


- Slaapkamer
- Woonkamer

TECHNICAL SPECIFICATIONS

Secondary backing:	SB
Quality code:	ZEN
Manufacturing process:	Tufted
Manufacturing process (hospitality):	1/10" Saxony
Pile composition:	PA
Pile composition (hospitality):	PA
Fire behaviour:	Bfl-s1
EN 1307 Classification:	Cl. 33 Commercial Heavy
Primary backing:	Non Woven
Total height mm:	8.0
Effective pile height mm:	6.0
Width:	400
Number of knots/sqm:	200940
Pile weight/sqm:	1000
Total weight gr/sqm:	
ISO 140/8 Impact sound insulation dB:	28
ISO 354 Sound absorption 1000Hz:	0.30
ISO 1654 Sound absorption:	0.25
DIN 52612 Thermal retention m ² /kW:	0.11
TOG Rating:	0.99

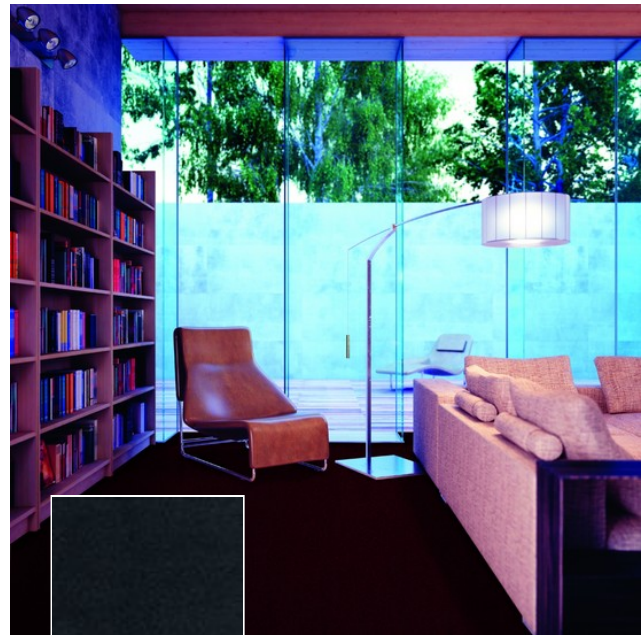

800 / Zen / Ebony

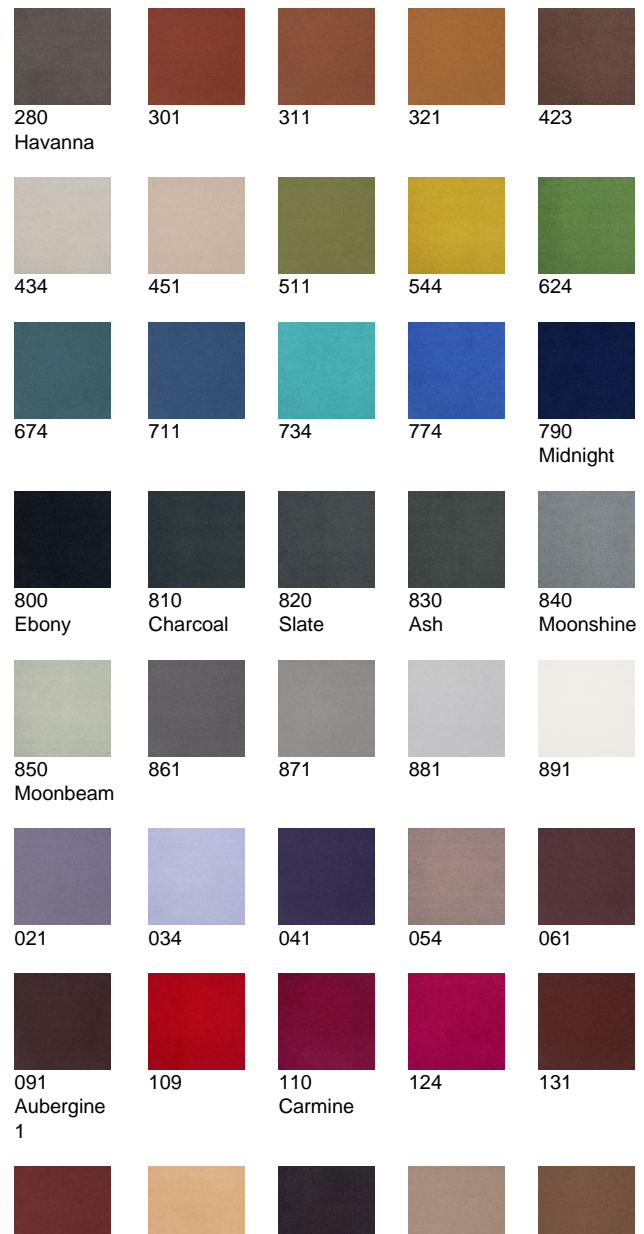

ISO 6356 2000 Teil 2: Permanently antistatic kV <:	2
ISO 6356 2000 Teil 6: Surface resistance RoT ≤:	10 E9
ISO 10965 Teil 6: Vertical resistance Rdt ≤ :	10 E9
ISO 105 B02 Lightfastness ≥:	5-6
ISO 105 E01 Waterfastness change in colour ≥:	4
ISO 105 E01 Waterfastness staining ≥:	3-4
ISO 105 X12 Rubbingfastness dry ≥:	4
ISO 105 X12 Rubbingfastness wet ≥:	4